



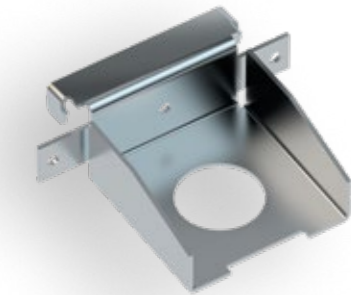

## CD CONNECTOR

Produced in thicknesses: 0.4 mm; 0.6 mm  
Quantity per package: 100 pcs.


The CD connector is designed to extend the length of the GD-60 load-bearing profiles. It is a key component when installing plasterboard ceilings in rooms with a large area. The connector is mounted on the inside of the profile until it produces a characteristic click, which indicates that it is fully secured. This protects the structure from deflection as a whole or sagging of the plasterboard.



## SIDE CD CONNECTOR

The side CD connector is used as the connecting element of the CD profiles for their T-joints at the same level when installing metal frames of suspended gypsum plasterboard ceilings. The connector is tightly attached to the CD profile with latching leaves, and then another metal frame profile is put on the one side in a T-shape.


Produced in thicknesses: 0.4 mm; 0.6 mm  
Quantity per package: 50 pcs.



## SINGLE-LEVEL CONNECTOR "CRAB"

It is essential for installation of different partitions and construction of plasterboard indoor structures. The single-level «Crab» connector allows you to connect four profiles at the same height together. This part is key when installing a frame for suspended ceilings, especially when the ceiling is of irregular shape.


Produced in thicknesses: 0.5 mm to 1.0 mm  
Quantity per package: 25 pcs.

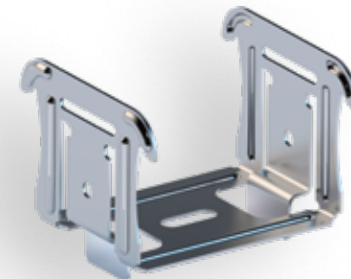

## TWO-LEVEL CONNECTOR

The two-level connector is intended for reliable joining of CD-60 plasterboard profiles at various levels perpendicularly. It is used for creation of multilevel designs of suspended plasterboard ceilings. The connector ensures the quality of installation on ceilings of large areas. The connector freely clings to the upper profile and locks tightly to the lower profile.

Produced in thicknesses: 0.7mm, 0.8mm and 0.9mm  
Quantity per package: 200 pcs.

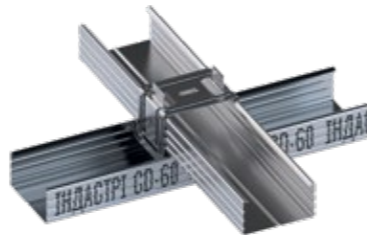

### VARIANT PROFILE SRL

Or. Targu Jiu, str. Tismana 1A, Judet Gorj, Romania

office@variant-profile.com


+40755383137

Production company VARIANT PROFILE SRL produces high quality metal profiles and accessories for gypsum board system. We have our own production facilities and more than 20 highly qualified employees in our staff, all products pass the quality control system.

We always welcome new partners, new ideas, new projects!

# Variant PROFILE

# PROFILE AND ACCESSORIES FOR PLASTERBOARD SYSTEMS

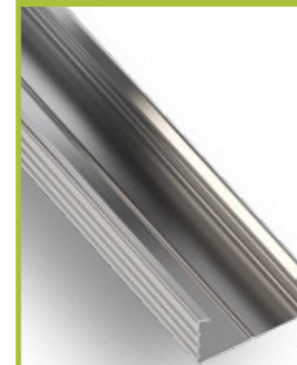


## CD-60 PROFILE


Produced in thicknesses: 0.4 to 0.6 mm

The CD ceiling-stud profile is used as a supporting element for the erection of frames and lining of vertical and horizontal surfaces. The CD profile is used together with the UD guiding profile. The profile has additional stiffeners, which ensure the stability of the frame under loads during installation

work. Due to the C-shaped form, the profile is attached to the surfaces by universal suspensions. Focusing on consumer needs, besides the plain CD-60 profile, we produce corrugated profiles. The CD-60 profile is made by double-sided punch forming.



Item	Size, mm	Length, m	Quantity per package, pcs	Quantity per package, linear meters	Quantity per pallet, pcs	Quantity per pallet, linear meters	Quantity per pallet, packages
CD-60	60x27	3	18	54	270	810	15
		4	18	72	270	1080	15




## UD-27 PROFILE

Produced in thicknesses: 0.4 to 0.6 mm

The ceiling perimeter profile UD is used as an element of the frame of single-level structures of ceilings and false walls. During the installation of ceiling frame the UD profile is fixed along the perimeter of the room, and

during the wall lining, to the floor and ceiling. Profiles are made with a smooth base and profiled flanges or, according to the customer's needs, with a corrugated structure.




Item	Size, mm	Length, m	Quantity per package, pcs	Quantity per package, linear meters	Quantity per pallet, pcs	Quantity per pallet, linear meters	Quantity per pallet, packages
UD-27	27x28	3	30	90	600	1800	20
		4	30	120	600	2400	20




## STUD CW

Produced in thicknesses: 0.4 to 0.6 mm


The CW profile is used as vertical studs when mounting plasterboard frames. The CW profile assembly is paired with the matching UW track profile. The size of the stud side provides a good connection with the track profile and guarantees a tight, gapless structure. Available profile thicknesses: 50 mm, 75 mm, 100 mm.



CW-50



CW-75



CW-100

Item	Size, mm	Length, m	Quantity per package, pcs	Quantity per package, linear meters	Quantity per pallet, pcs	Quantity per pallet, linear meters	Quantity per pallet, packages
CW-50	50x50	3	16	48	192	576	12
		4	16	64	192	768	12
CW-75	75x50	3	8	24	128	384	16
		4	8	32	128	512	16
CW-100	100x50	3	8	24	96	288	12
		4	8	32	96	384	12

